

RUBAN 3528-60
SÉRIE RUBAN




0/1~10V
PWM DALI




Lifetime



LM 80
compliant

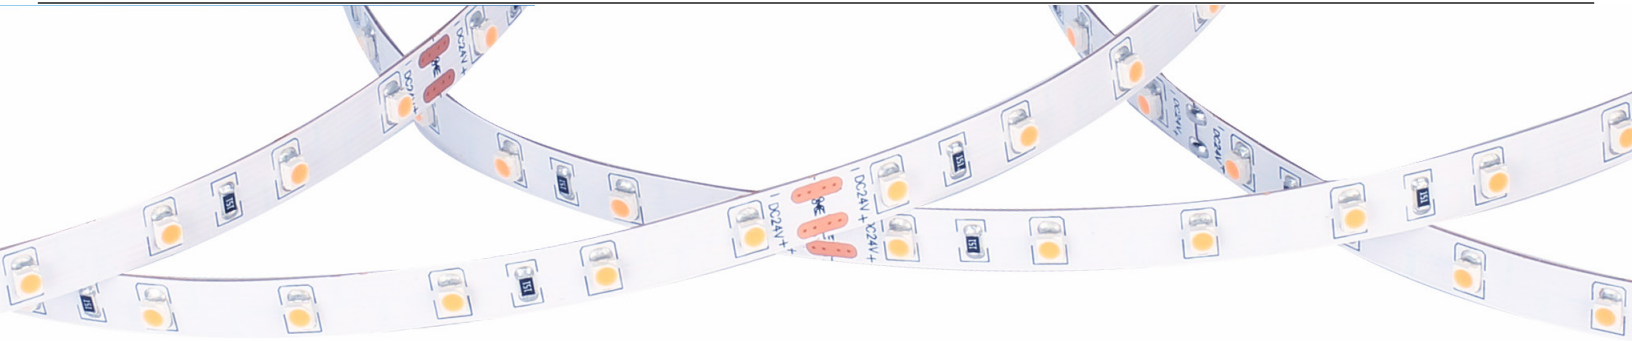

SPÉCIFICATIONS

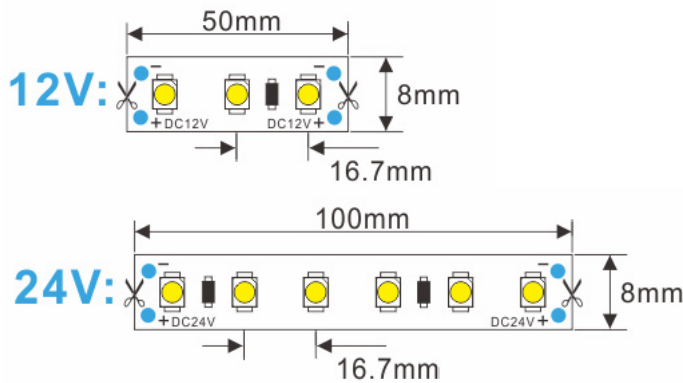


RUBAN 3528-60


- Ruban de 8mm
- 4.8 watts au mètre
- 75 lumen au watt
- 322 lumen au mètre
- Fonctionnement entre -20°C ~ +50°C
- Ruban 24V (12V aussi disponible)
- 1A (24V) / 2A (12V)
- "Classification" DELs - moins de 3 MacAdam
- 90+ CRI disponible

MODÈLE	LUMEN / M	Ra (CRI)	R9	ANGLE	VARIATION
2100K	276	81	17	120°	2100K ± 100
2400K	283	83	19		2400K ± 100
2700K	298	84	22		2700K ± 200
3000K	310	85	27		3000K ± 100
3500K	322	82	25		3500K ± 100
4000K	345	80	22		4000K ± 200
6000K	360	80	18		6000K ± 200
RGB	N/A	N/A	N/A		N/A

IP20 (Non-waterproof)

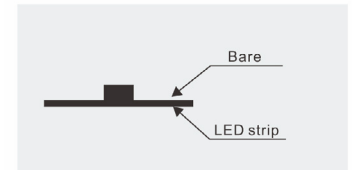

IP67 (Heat shrink tube)

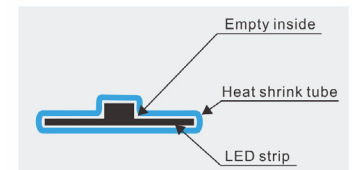

MODÈLE - LONGUEUR - RUBAN - DEL - COULEUR - VOLT⁽¹⁾ - IP⁽²⁾

OLED - [] - 3528 - 60 - [] - 24V - 20

2100K	2100K ± 100	3500K	3500K ± 100
2400K	2400K ± 100	4000K	4000K ± 200
2700K	2700K ± 100	6000K	6000K ± 200
3000K	3000K ± 100	RGB	RED/GREEN/BLUE

(1) - 12V DISPONIBLE SUR DEMANDE
(2) - IP67 DISPONIBLE SUR DEMANDE