

RUBAN 5630-60  
SÉRIE RUBAN




0/1~10V  
PWM DALI




Lifetime



LM 80  
compliant

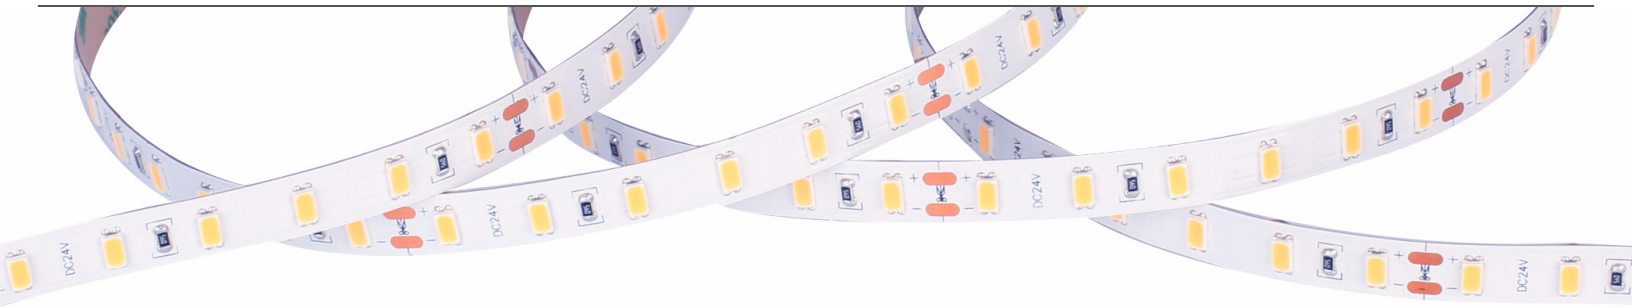

### SPÉCIFICATIONS

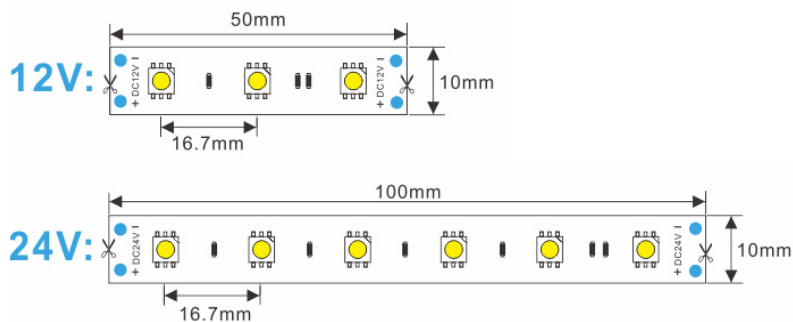


### RUBAN 5630-60


- Ruban de 10mm
- 14.4 watts au mètre
- 125lumen au watt
- 1800 lumen au mètre
- Fonctionnement entre -20°C ~ +50°C
- Ruban 24V (12V aussi diponible)
- 3A (24V) / 6A (12V)
- "Classification" DELs - moins de 3 MacAdam
- CRI 90+ disponible

MODÈLE	LUMEN / M	Ra (CRI)	R9	ANGLE	VARIATION
2700K	1620	85	27	120°	2700K ± 100
3000K	1680	85	28		3000K ± 100
3500K	1710	84	26		3500K ± 100
4000K	1740	83	22		4000K ± 200
6000K	1800	83	22		6000K ± 200

#### IP20 (Non-waterproof)

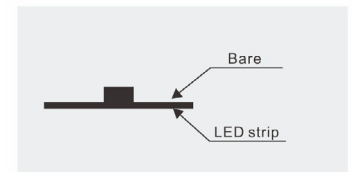

#### IP67 (Heat shrink tube)

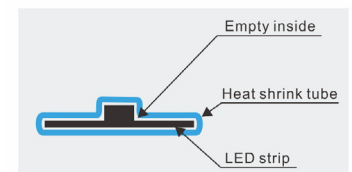

MODÈLE - LONGUEUR - RUBAN - DEL - COULEUR - VOLT<sup>(1)</sup> - IP<sup>(2)</sup>  
**OLED** -  - **5630** - **72** -  - **24V** - **20**

(1) - 12V DISPONIBLE SUR DEMANDE  
(2) - IP67 DISPONIBLE SUR DEMANDE

2700K	2700K ± 100
3000K	3000K ± 100
3500K	3500K ± 100
4000K	4000K ± 200
6000K	6000K ± 200